



### Removal

---

- 1 Unscrew door locking knob.
- 2 Unscrew fastening screws at top of paneling and remove paneling.

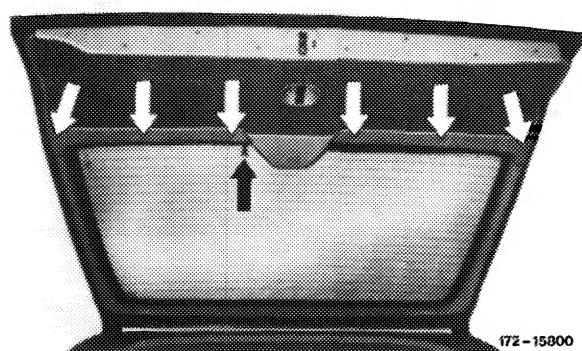

- 3 Unscrew rosette for inside actuation and remove.
- 4 Remove door lining laterally from clips and pull out of lower rail in upward direction.

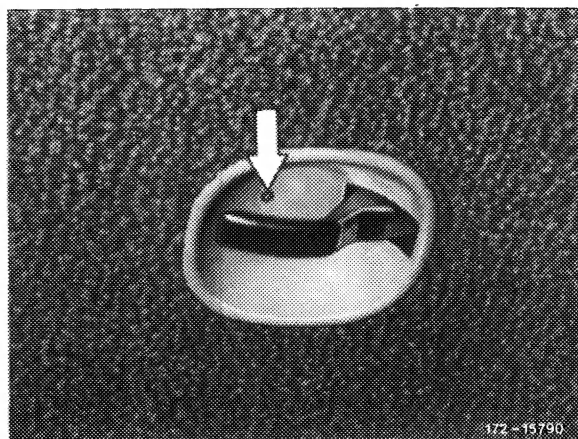

### Installation

---

- 5 For installation proceed vice versa.